

HELIX⁺

ARISTOCRAT

BRINGING THE GAME FORWARD - AGAIN.

The Helix™ + builds further innovation into our growing and very successful Helix line. With no increase in footprint, it features a sleek design, larger 27" monitors, a virtual button deck, award winning content and improved service access. Available in a wide range of configurations, the Helix™ + range delivers innovation.

Helix+ hardware at a glance

- 27" Infinity-edged frameless displays with 1080p resolution
- Integrated pinstripe lighting for captivating visuals
- Brilliant rear surface ambient lighting
- Stylish champagne nickel finish
- Quad sound package with ported enclosed subwoofer
- Sleek virtual button deck
- Improved hardware designs including simplified latching, strengthened door, eliminated redundant lock assembly and improved bill acceptor assembly



QUICK FIRE
FLAMING JACKPOTS™

\$5,000.01

PLAY 4 GAMES TO WIN SUPER JACKPOT

\$2,250.00	\$200.00
\$40.01	\$10.01

Play 4 Games at once for a chance to win WILD REELS, SUPER FREE GAMES FEATURE and SUPER JACKPOT.

GRAND
\$15,000.00
HIT BEFORE \$15,000.00

DRAGON BUCKS

MAJOR
\$1,025.00
HIT BEFORE \$1,199.00

Game 1: Wheel Feature
Game 2: 5x3 Reels
Game 3: 5x3 Reels
Game 4: 5x3 Reels

CREDIT 19800 / BET 200 / WIN 70

ARISTOCRAT

Q	K	🌍	A	🌍
🌴	🐉	K	🌸	J
A	A	🌸	J	A

CREDIT 200 / BET 0 / WIN 0

ARISTOCRAT




HELIX™ +


Specifications Helix™ + Upright

Physical Characteristics		
Cabinet Dimension (typical)	Metric (millimeters)	Imperial (inches)
Casino Top		
Height	1331.00	52.40
Width	680.70	26.80
Depth	635.00	25.00
Casino Top with Topper		
Height	1676.40	66.00
Width	680.70	26.80
Depth	635.00	25.00
Cabinet Weight (typical)		
Casino Top with bill acceptor and printer	131.50 kg	290.00 lbs
Supply Voltage Requirements		
Mains Input Voltage		
Minimum		100V AC
Maximum		240V AC
Frequency		50 Hz /60 Hz
Power Requirements with Dual 27" LED		
Mains Input Current		
EGM Typical	1.6A	0.75A
Power Consumption at Nominal Voltage		
EGM Typical	180W	170W
Typical Heat Load	620 BTU/hr	580 BTU/hr
Maximum Load Current		
Auxiliary Power Outlet (main switch controlled)	1A	1A
Auxiliary Power Outlet (independently switched)	1A	1A
Power Factor		
>50% load, exceeds	.95	.95
Environment Requirements		
	Operating	Storage
Minimum Temperature	10C (50F)	-20C (-4F)
Maximum Temperature	40C (104F)	60C (140F)
Relative Humidity	0-85% non-condensing	0-95% non-condensing

Helix+ Upright

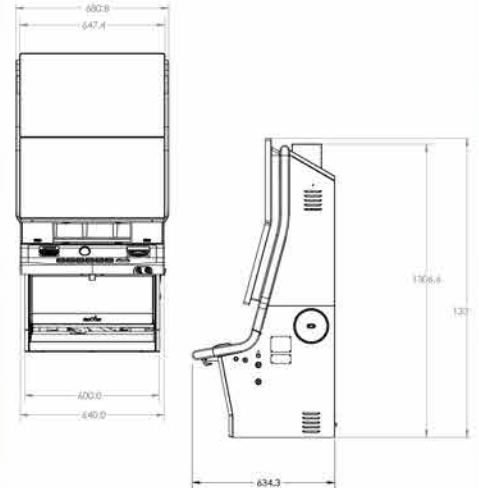

Helix+ Upright with Topper

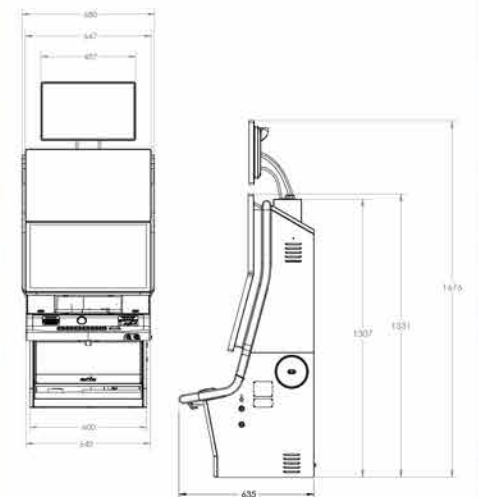

To learn more about Helix™ + contact your Aristocrat Account Executive.

HELIX⁺

Aristocrat products are protected by patents. For a full list of Aristocrat patents please check with your local Patent Office.
© 2016 Aristocrat Technologies Australia Pty Limited. ARISTOCRAT, Helix⁺, and Aristocrat Logo are trademarks or registered trademarks of Aristocrat Technologies Australia Pty Limited.
35-00582-00

